Art. 11.A24.00..S099

EM.A31.09..9810 · IX/13

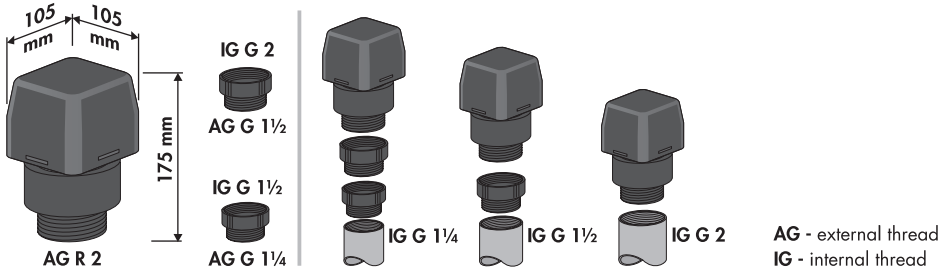

ventilair active AG G 2, G 1½, G 1¼

Ent- und Belüfter mit Aktivkohle-Filtervlies für den zugänglichen Außenbereich zur Filterung von entstehenden Gasen bei

- Hauskläranlagen
- Hebeanlagen
- vorhandenen offenen Entlüftungen, z.B. Öltanks

Der Filtereinsatz besteht aus einem Mehrschichtgewebe mit imprägnierter Aktivkohle. Der Filtereinsatz ist spätestens alle zwei Jahre, bei wahrnehmbaren Gerüchen auch eher, zu wechseln.

Abdeckkappe öffnen und Filtereinsatz austauschen.

Der ventilair active ist passend für die Dimensionen IG G 2, G 1½, G 1¼.

Einbau vertikal oder horizontal.

Luftdurchströmmenge bei 250 PA = 3,33 l/s = 12 m³ h.

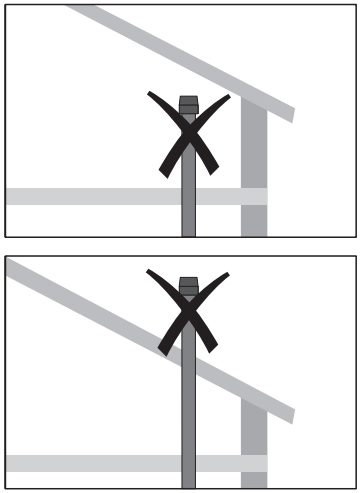



Art. 11.A25.00..0099
Ersatz-Filtereinsatz zu ventilair active

ventilair active AG 2, 1½, 1¼

two-way vent valve with active carbon filter pad for accessible external areas, for filtering arising gases in

- domestic sewer systems
- toilet lifting systems
- existing open vents, e.g. on oil tanks

The filter insert is a multi-layer fabric, impregnated with active carbon. The filter insert has to be replaced every two years at the latest, or even before when odours are noticed.

Open the cap and replace the filter insert.

The ventilair active fits sizes IG 2, 1½, 1¼.

Suitable for vertical or horizontal installation.

Air flow volume at 250 PA = 3.33 l/s = 12 m³/h.

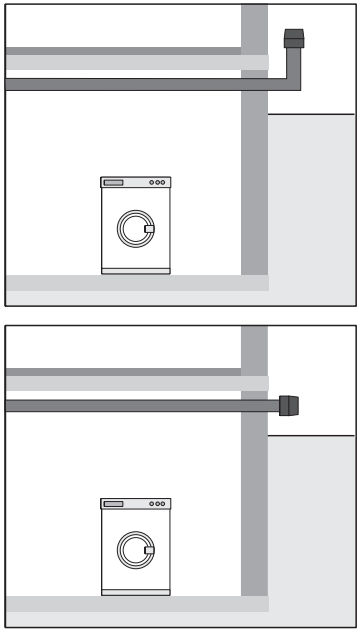



Art. 11.A25.00..0099
Replacement filter insert for ventilair active

Sanitärtechnik Eisenberg GmbH
Betriebsstätte Rödental
Postfach 1109 · D 96466 Rödental
Am Bahnhof 20 · D 96472 Rödental
Tel. +49(0)9563/930
Fax +49(0)9563/93 226
info@sanit.com · www.sanit.com

Art. 11.A24.00..S099

EM.A31.09..9810 · IX/13

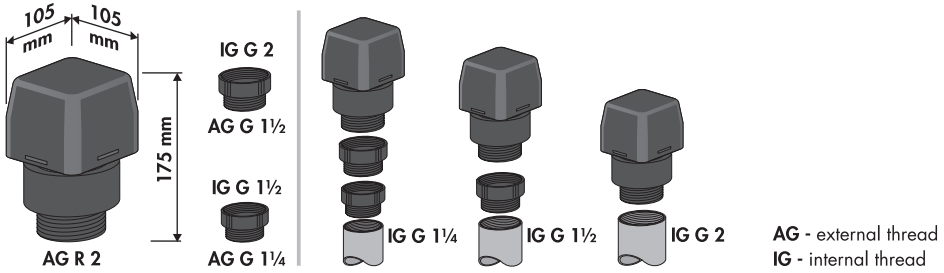

ventilair active AG G 2, G 1½, G 1¼

Ent- und Belüfter mit Aktivkohle-Filtervlies für den zugänglichen Außenbereich zur Filterung von entstehenden Gasen bei

- Hauskläranlagen
- Hebeanlagen
- vorhandenen offenen Entlüftungen, z.B. Öltanks

Der Filtereinsatz besteht aus einem Mehrschichtgewebe mit imprägnierter Aktivkohle. Der Filtereinsatz ist spätestens alle zwei Jahre, bei wahrnehmbaren Gerüchen auch eher, zu wechseln.

Abdeckkappe öffnen und Filtereinsatz austauschen.

Der ventilair active ist passend für die Dimensionen IG G 2, G 1½, G 1¼.

Einbau vertikal oder horizontal.

Luftdurchströmmenge bei 250 PA = 3,33 l/s = 12 m³ h.

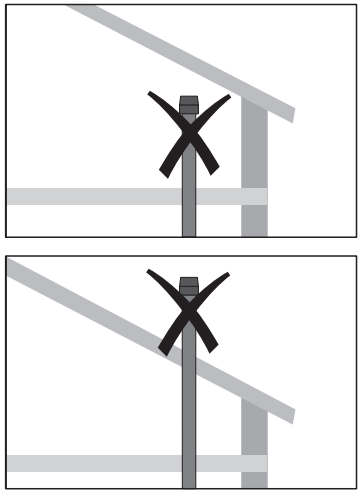



Art. 11.A25.00..0099
Ersatz-Filtereinsatz zu ventilair active

ventilair active AG 2, 1½, 1¼

two-way vent valve with active carbon filter pad for accessible external areas, for filtering arising gases in

- domestic sewer systems
- toilet lifting systems
- existing open vents, e.g. on oil tanks

The filter insert is a multi-layer fabric, impregnated with active carbon. The filter insert has to be replaced every two years at the latest, or even before when odours are noticed.

Open the cap and replace the filter insert.

The ventilair active fits sizes IG 2, 1½, 1¼.

Suitable for vertical or horizontal installation.

Air flow volume at 250 PA = 3.33 l/s = 12 m³/h.

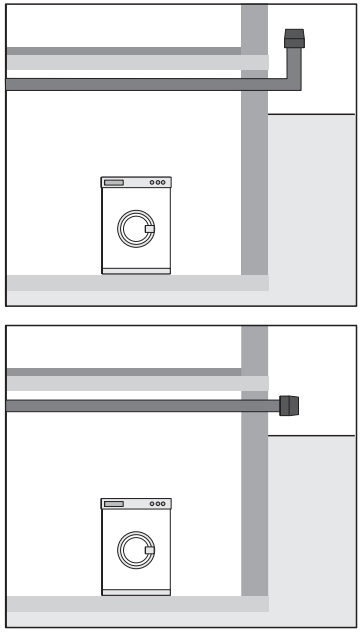



Art. 11.A25.00..0099
Replacement filter insert for ventilair active

Sanitärtechnik Eisenberg GmbH
Betriebsstätte Rödental
Postfach 1109 · D 96466 Rödental
Am Bahnhof 20 · D 96472 Rödental
Tel. +49(0)9563/930
Fax +49(0)9563/93 226
info@sanit.com · www.sanit.com