
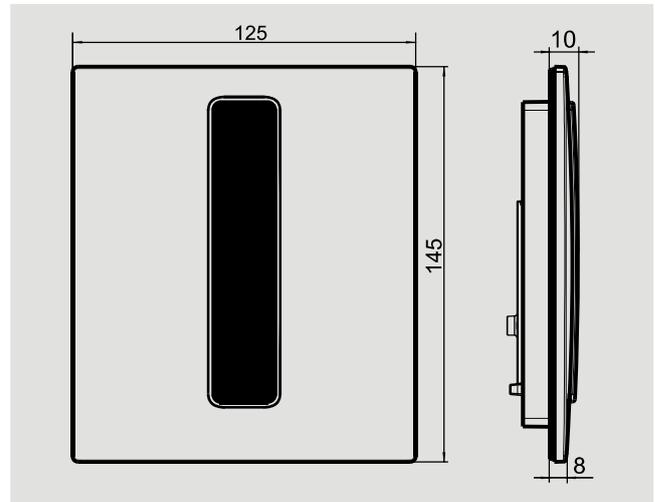


Urinal cover plate INEO BRIGHT infrared

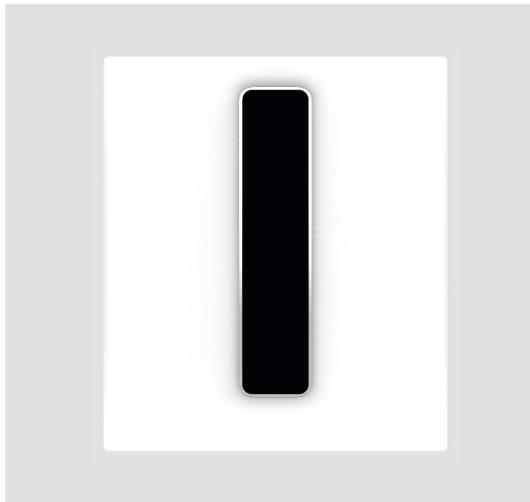

Usage

- for cartridge valve technology
- for use in private and semi-public areas

Features

- contact-free flushing system controlled by infrared sensor

Technical specifications

- flow pressure: 0.5-8 bar
- flow rate: 0.3 l/sec.
- power supply: 6V DC
- sensor range: approx. 0.5 m
- dwelling time: approx. 5 sec.
- main flush: approx. 4 sec.
- hygiene period/hygienic flush: 24 h after last use

Included

- cartridge filter
- power supply unit 6V DC
- mounting frame with infrared module and control electronics
- cover plate
- fastenings

Urinal cover plate INEO BRIGHT infrared

Accessories

- service and maintenance remote control Code No. 03.806.00..0000
- battery holder (Code No. 03.109.00..0000) for lithium photo battery CR P 2, Code No. 02.993.00..0000, not included
- power supply mains, in-series, 230V AC/6V DC with 6V DC adapter plug, 600 mm cable, for 1-5 urinals, (power supply unit Code No. 01.251.00..0000, to be ordered separately), data for single connecting cable with in-series installations: max. cable length 10 m with min. cross section of 2x0.75 mm², material: copper, longer cable lengths possible with bigger cross sections

Code no.

- 16.094.01..0000 - plastic, alpine white
- 16.094.81..0000 - plastic, chrome
- 16.094.00..0000 - brushed stainless steel

Note: power supply has to be ordered separately, see accessories.